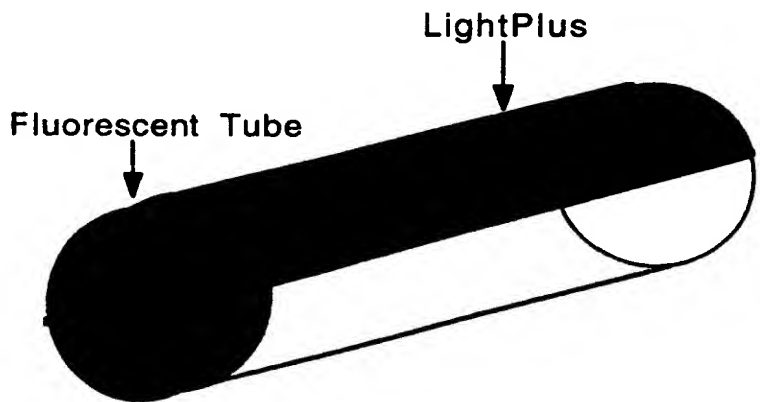


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b> <b>H01J 1/70</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 94/22160</b> <b>(43) International Publication Date:</b> 29 September 1994 (29.09.94)
<b>(21) International Application Number:</b> PCT/US93/02760 <b>(22) International Filing Date:</b> 22 March 1993 (22.03.93) <b>(71)(72) Applicant and Inventor:</b> HEFLIN, Edward, G. [US/US]; 14132 Kerry Street, Garden Grove, CA 92644 (US).		<b>(81) Designated States:</b> AU, BB, BG, BR, CA, CZ, FI, HU, JP, KP, KR, LK, LU, MG, MN, MW, NO, NZ, PL, PT, RO, RU, SD, SK, UA, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> LIGHT PLUS  <b>(57) Abstract</b> <p>A method of light reorientation and recovery, is based on circular mirror system (figure 2) that has the same radius of curvature and the same center as that of the light source with which the system functions. These characteristics allow the system to reorient light rays striking the surface normally in the opposite direction toward the centre of the light source. This reoriented light flux passes through the centre of the light tube, exits, and combines with the non reoriented light flux to give more visible light to the areas desired. In a fluorescent tube, the system is mounted outside the light tube surface, and directly reorients the visible light, or mounted inside the light tube surface, and reorients the ultraviolet light toward the other side of the tube where it then undergoes fluorescence. In either case, the end result is more visible light to the areas where it is desired.</p> <div data-bbox="747 1123 1502 1522"></div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## Description: Light Plus

### **Introduction:**

The present invention reorients the light flux of a fluorescent tube to places where it is needed most yielding a larger intensity of visible light. More specifically, it reorients a maximum quantity of light flux with the greatest efficiency in the direction desired. The method proposed here attempts to minimise the losses due to absorption, remission, and reflection caused whenever light strikes a surface by minimising the number of reflections light undergoes before reaching the areas where it is most needed.

### **Theory of the Invention:**

The invention is based on a method of reflecting light rays by a system characterised by the following:

- A thin reflective layer which is circular in form.
- The radius of curvature of this reflective layer is that of the cylindrical light tube with which it functions.
- The centre of this reflective layer corresponds to the same centre of the cylindrical light tube with which it functions.
- The reflective layer is mounted on the surface either inside or outside the cylindrical light tube with which it functions.

These characteristics allow the system to reorient each light ray striking its surface normally in the opposite direction toward the centre of the cylindrical light tube (see Figures 2a, 2b, 3a, and 3b).

The reoriented light flux passes through the centre of the tube, exits the tube on the opposite side, and combines with the non-reoriented light rays resulting in a greater intensity of the visible light.

### **Application to the Fluorescent Tube:**

One important type of cylindrical light tube for which the invention can be applied is the fluorescent tube. The operation of such light tubes is well known. Briefly, an electric discharge across a low pressure mercury vapour produces emissions of ultraviolet light at a

**SUBSTITUTE SHEET**

frequency of 2537Å. Although light at this frequency is not visible to humans, this light impinges a thin fluorescent layer coating the inside of the light tube to produce visible light according to Stokes Law. The resulting light contains a part perpendicular to the surface of the tube.

This is the reason this method of reorientation applied to the fluorescent tube is characterised in the following ways:

- The primary light emitted normally to the surface of the tube is reoriented in the opposite direction, passes through the centre and exits from the other side of the tube toward the areas desired.
- The secondary light emitted at other angles to the surface of the tube is reoriented near the centre of the tube or again toward the mirror and follows a path to exit from the other side of the tube toward the desired areas (see Figures 3a and 3b).

This is also the reason that the application of the method to the fluorescent tube is distinguished in two different ways. In the first, the system is mounted outside the tube and directly reorients the visible light produced by the fluorescent layer of the tube. The second way consists of mounting the system inside the tube to reorient the ultraviolet rays toward the other side of the tube where they undergo the process of fluorescence and consequently produce visible light. Regardless of the way the method is applied to the fluorescent tube, the results are the same: the visible light flux composed of reoriented light and non-reoriented light, is more intense in the directions where it is most desired.

### **Model:**

In practice, the invention is implemented by a system composed of an extremely reflective layer that is in direct contact with the surface of the tube, either on the interior or exterior surface of the tube. The simplest system consists of two parts:

- 1) A thin reflective layer.
- 2) A means of attachment to the tube.

The layout of the system is shown in Figures 1a and 1b.

### **1) The Thin Reflective Layer**

The thin reflective layer serves as the mirrored surface of the system. It is from a flexible material like plastic or paint with high reflectivity (greater than 95% reflectivity) and resistant to the average operational temperature of a standard fluorescent tube. The size of this thin layer depends on the tube with which it functions as well as the quantity of light flux desired (see Section Results).

### **2) The Means of Attachment**

The mechanism of attachment serves to put in contact the thin reflective layer with the fluorescent tube. It is accomplished with a cohesive material like tape or clips as shown in Figures 1a and 1b. The cohesive material or clips are made of non-toxic materials which are resistant to the average operational temperature of a standard fluorescent tube. The adhesive material or clips are placed at each extremity of the thin reflective layer as well as at regular intervals along the length of the tube.

Two versions of the invention have been created and tested, notably one with tape and one using clips. The two versions covered 50% of the surface of the light tube by the reflective layer and functioned outside the light tube. It should be mentioned that the workings of the system are exactly the same for application of the invention inside the tube, except for the fact that it is necessary to change the reflective material to that for ultraviolet light.

### **Results:**

Two different types of tests have been performed for the two models of the invention: 1) A test with an isolated fluorescent tube and 2) A test with the fluorescent tube and its original system of light diffusion.

1) In comparison to the isolated fluorescent tube, the invention increased the light flux between 32% and 36% to the areas desired,

**SUBSTITUTE SHEET**

corresponding to an efficiency of reorientation between 64% and 72%.

2) In comparison to a fluorescent tube with its original system of light diffusion, the invention increased the light flux between 11% and 23% to the areas desired (according to the original system of diffusion), corresponding to an efficiency of reorientation between 22% and 46%.

Theoretically, the quantity of light flux which can be attained corresponds exactly to the surface of the fluorescent tube covered divided by the area of the surface of the entire tube according to the inverse square law for the flux of light. In application, this quantity corresponds to the angle swept by the circular-reflective layer covering the tube. The corresponding quantity of light flux which can be attained by the system is calculated from the following formula:

$$F_{ideal} = \left( \frac{\alpha}{2\pi} \right)$$

where  $F_{ideal}$  represents the ideal quantity of light flux added in per cent,  $\alpha$  represents the angle swept by the circular-reflective layer of the system covering the tube in radians, and  $2\pi$  is the angle traversed by a circle in radians. Actually, this formula represents the ideal case, however in practice the efficiency of the reflection must be taken into account as shown in the following formula:

$$F_{real} = \left( \frac{\alpha}{2\pi} \right) \epsilon$$

where  $F_{real}$  is the real quantity of light flux increased in per cent and  $\epsilon$  represents the efficiency of reorientation. This is the reason why the method of reorientation of the light flux is characterised by the angle swept by the reflective layer and corresponds to the quantity of light flux obtained up to 50%. This is also the reason that

**SUBSTITUTE SHEET**

the direction of the reoriented light flux can be controlled by this method through the orientation of the thin layer on the light tube.

Although it is possible to cover more than 50% of the surface of the light tube, the results are less efficient. In fact, the most efficient results are obtained when 50% of the surface of the tube is covered by the thin layer and 50% is exposed to the areas desired (see Figures 2a and 2b). Under these conditions, 50% of the light exits directly from the fluorescent tube and the other 50% after reflecting from the reflective layer a minimum number of times.

### **Conclusion:**

In conclusion, the present invention proposes a method of reorientation of light flux with a circular mirror system having the same form, the same radius, and the same centre as that of the light tube with which it functions. This allows each normal ray of light to be reoriented in the opposite direction toward the centre of the light tube. The reoriented light flux passes from the centre of the light tube, exits the tube at the other side, and combines with the non-reoriented light flux to result in more visible light.

In application of the invention to the fluorescent light tube, a cohesive material or clips connect the thin layer of extremely reflective material to the surface of the tube. The system functions outside the tube by directly reorienting the visible light or inside the tube by reorienting the ultraviolet light that then undergoes the phenomena of fluorescence on the other side of the tube.

In application to the fluorescent tube, the invention has several advantages for increasing the visible light flux to areas desired. Among these advantages are the following:

- 1) The system doesn't use electricity.
- 2) The system possesses a life which is practically unlimited.
- 3) The system installs directly on the lighting which is in place and in the same time as that for a simple fluorescent tube.

- 4) The system costs less than the average price of a standard fluorescent tube.
- 5) The system increases the visible light flux up to 36% to the areas desired.

**SUBSTITUTE SHEET**



## Claims:

1. The method of reorientation of light flux otherwise disperses away from the desired areas for cylindrical light tubes. The method is characterised by the fact that:

- The primary light emitted normally to the surface of the tube is reoriented in the opposite direction, passes through the centre, and exits from the other side of the tube toward the areas desired.
- The secondary light emitted at other angles to the surface of the tube is reoriented near the centre of the tube or toward the reflective surface and follows a path to exit the tube toward the desired areas.

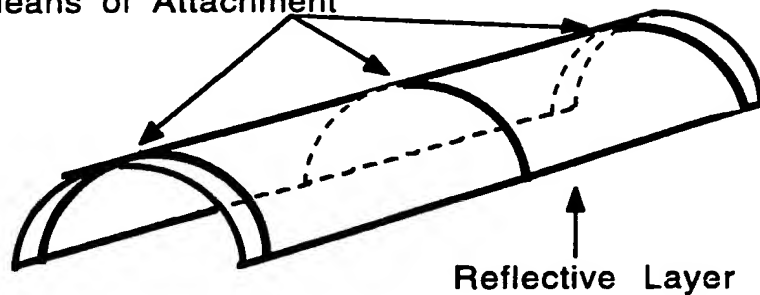

2. The method in accordance with Claim 1 and effectuated by a reflective system which is characterised by the following:

- A thin reflective layer which is circular in form.
- The radius of curvature of this reflective layer is that of the cylindrical light tube with which it functions.
- The centre of this reflective layer corresponds to the same centre of the cylindrical light tube with which it functions.
- The reflective layer is mounted on the surface either inside or outside the cylindrical light tube with which it functions.

3. The method according to Claims 1 and 2 and characterised by the fact that the angle swept out by the reflective layer on the cylindrical light tube is directly related to the quantity of light flux obtainable and for which the direction can be controlled by the orientation of the reflective layer on the light tube.

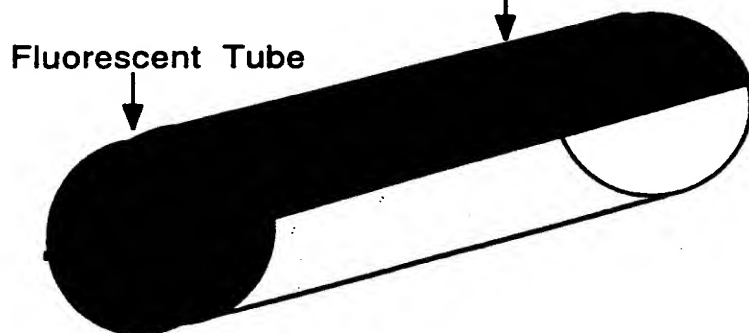

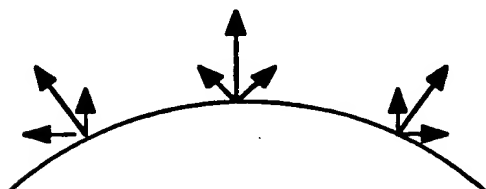
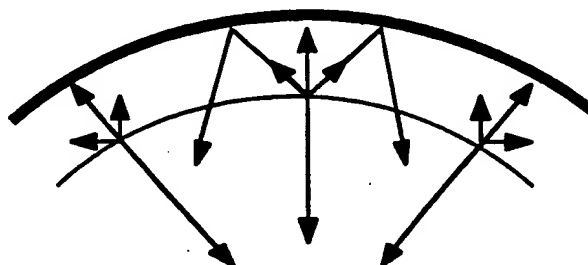
Figure 1: Light Plus - Description1a) Perspective View

Means of Attachment

1b) Side ViewFigure 2: LightPlus - Application2a) Perspective View

LightPlus

Fluorescent Tube

2b) Side ViewFigure 3: LightPlus - Method of Operation3a) Fluorescent Light Tube3b) Light Tube with LightPlus**SUBSTITUTE SHEET**

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US93/02760**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(5) :H01J H70

US CL :313/113,489

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. :

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 4,336,479 (KODAMA ET AL.) 22 June 1982, See column 4, lines 9-13, figures 4A and 4B.	1-2
X	US, A, 4,255,687 (van ENGELN ET AL.) 10 March 1981, See column 2, line 5-31.	1-2
X	US, A, 3,767,956 (BAUER) 23 October 1973, See entire document.	1-2
X	US, A, 3,225,241 (SPENCER ET AL.) 21 December 1965, See column 3, line 31-column 4, line 33.	1-2



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be part of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G*	document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means		
*P* document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

04 JUNE 1993

Date of mailing of the international search report

OCT 19 1993

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

MICHAEL HORABIK  
Telephone No. (703) 305-4812

Form PCT/ISA/210 (second sheet)(July 1992)\*

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US93/02760**Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)**

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 3  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

**Remark on Protest**

- ☐ The additional search fees were accompanied by the applicant's protest.  
☐ No protest accompanied the payment of additional search fees.